

DOSYA NO (FILE NUMBER) : 25-G19
 SIRA NO (ITEM NUMBER) : 6
 STOK NO : 14F010691
 MALZEME ADI (MATERIAL NAME) : SOCKET OUTLET, FEMALE DS2(250A)



MAIN FEATURES			
Rated current (with wiring according to standard)	250 A	Ambient temperature	-40°C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	70-95 mm ²
IP protection lid closed	IP55	Stranded wiring (min-max)	70-120 mm ²
IP protection plug connected	IP54	Keying positions	12
Shock resistance	IK09		

Load-break capability of the DECONTACTOR™		
Comply with IEC/EN 60309-1 and IEC/EN 60309-4 standards	(250 A/500 V) or (200 A/690 V)	
Load-break capability according to IEC/EN 60947-3/AC-22 A	(250 A/400 V) or (125 A/690 V)	
Load-break capability according to IEC/EN 60947-3/AC-23 A	160 A/440 V	
Short-circuit current Icc	10 kA	

	SOCKET-OUTLET female DS2 (250 A)	INLET male DS2 (250 A)		
	380-440 V AC	3P+E	3924013	3928013
Dual-voltage socket-outlet (see p. 7)	220-250 V AC / 380-440 V AC	3P+N+E	3924017	3928017
	660-690 V AC	3P+E	3924193	3928193
	380-400 V AC / 660-690 V AC	3P+N+E	3924197	3928197
	1000 V AC	3P+E	3924223	3928223
	Auxiliaries 5 A/400 V AC	3P+N+E + 2 contacts	Ref. + 972	Ref. + 972
	Auxiliaries 5 A/400 V AC	3P+E + 4 contacts	Ref. + 174	Ref. + 174
	Auxiliaries 5 A/400 V AC	3P+E + 6 contacts	Ref. + 976	Ref. + 976
	For IP66/67		Ref. + 600	Ref. + 600

► Other voltages, frequencies and contact configurations are available (see page 10).
 For more than 2 auxiliary contacts, please contact us.


INFO+

OPTIONS AND ACCESSORIES

Find the boxes, sleeves and handles at the end of the section page 45.





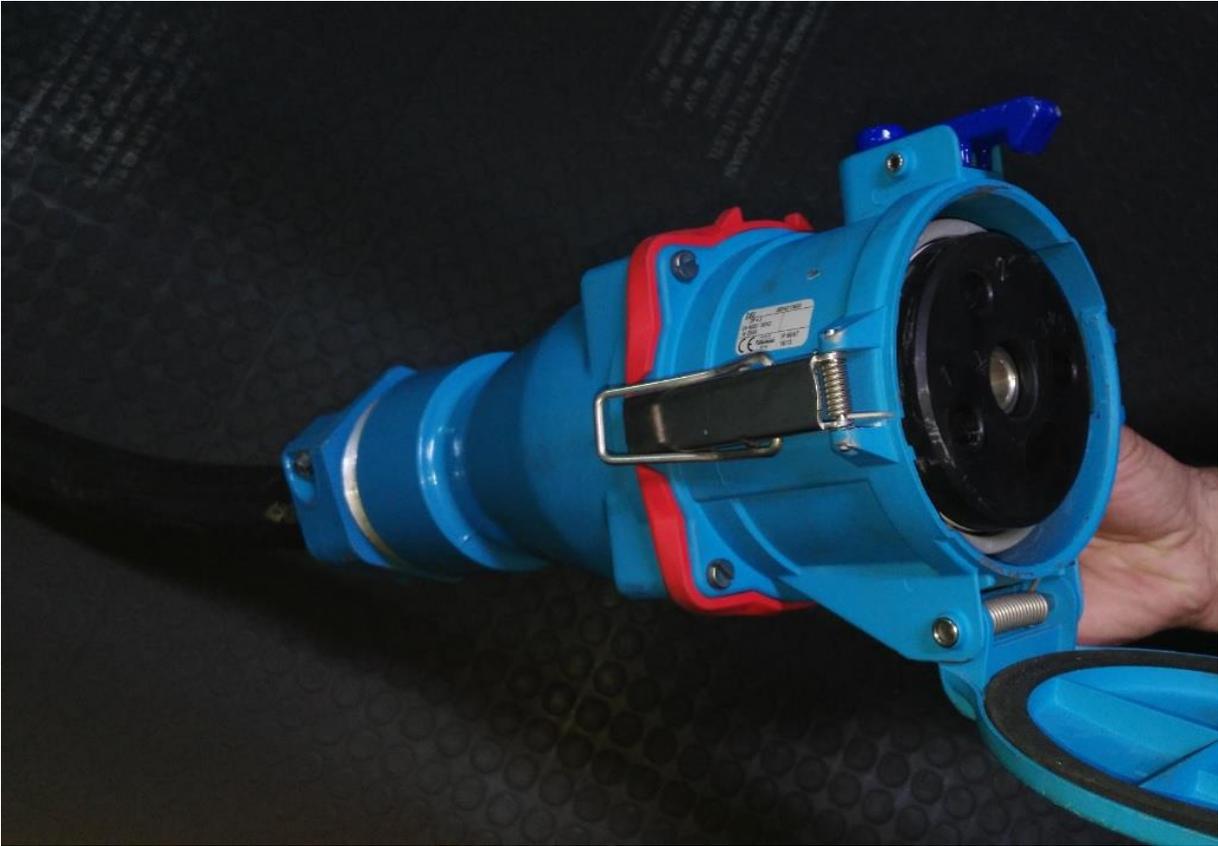

SIRA NO (ITEM NUMBER) : 17

STOK NO : 145467913

MALZEME ADI (MATERIAL NAME) : CONNECTOR,PLUG,ELECTRICAL

